



QENDRA

QENDRA
QENDRA®



QENDRA

COLOR



QENDRA

QENDRA machines combine a robust and reliable design, with the Jofemar extraction system, adaptable to any product, and a high-capacity product lift, with fast, efficient and friendly delivery to the product and the end user. In addition, QENDRA° machines are equipped with a refrigeration unit with high energy efficiency.



ANTI-VANDALISM PLATE
CLOSURE



OPTIMIZATION, CAPACITY
AND VOLUME



J-SUITE



PRODUCT DELIVERY
DETECTION PHOTOCELLS



EASY FLEX DELIVERY
SYSTEM



ELEVATOR

Main features



MACHINE NAME	Unpacked MEASUREMENT	WEIGHT	CONSUMPTION	ELEVATOR	COOLING UNIT	KEYBOARD	PAYMENT METHOD
QENDRA	1835x802x1026	411	230V/30W	Yes	No	+ TAOS	No
QENDRA° EPREL QENDRA°: C	1835x802x1056	437	230V/230W	Yes	Yes	+ TAOS	No

QENDRA



FEATURES

- **Product pick-up elevator at an ergonomic height** designed to dispense long-length, shock-free products, offering gentle and safe delivery to the end user.
- **Advanced security systems** in the elevator and automatic opening and closing of the product collection door, which guarantee security against theft and accidents.
- **Capacity** up to 8 trays of up to 10 adjustable channels, which provide more interior height than other Jofemar machines.
- QENDRA° with the possibility of **programming the temperature** and having an interior temperature of 4°C to 25°C.
- Operation in environments with 65% maximum humidity.
- **Detection of correct sales** by means of photocells.
- **Expiration date programming** by selection number or channel. It inhibits the sale of these products.
- **Easy to change the position of channels and partitions without tools.**
- **Intelligent or manual auto-adjustment** of the push force for each channel, adapting to the characteristics of each product.
- **Multi-sales system**, capable of delivering several products in a single manoeuvre.
- **FIFO** system (First in First out), which ensures continuous product renewal.

DESIGN

Our QENDRA and QENDRA° vending machines stand out for their robust and elegant design, thanks to their newly designed, high-capacity product lift that is gentle on the products and the end user.

- Elegant and robust design with different finishes for the door and with the **option of graphic customization with corporate design.**
- **Transparent glass front** of 695x558mm and product collection door glass of 286x558mm
- Modular structure in furniture **protected against corrosion and rust.**
- **Product collection door** made of glass and with an automatic opening and closing system, which improves the end-user's shopping experience and ensures a complete view of all products






OPTIONS

- Option to have a **cooling group** in our QENDRA version.
- Dispensing ramp for fragile products.
- Assembly of different types of locks according to the customer's needs.
- Internal **heater kit** capable of keeping the inside of the machine 25°C above ambient temperature, up to a maximum of 25°C. It prevents accidental freezing of products due to external environmental causes and tempers products that require it as long as they do not saturate the interior with moisture.


PROGRAMMING

- Possibility of **programming the interior temperature** of the machine between 4°C and 25°C.
- Satellite machine with the need to be controlled by a control unit, our TAOS range or Jofemar brand control machines.
- **Machine control** by means of a control module or a master machine connected through an RS485 communication port, both commanded by a JSD device, capable of simultaneously controlling four vending machines or three machines and four locker modules with a total of eighty compartments.
- Collection and sending of machine condition data to the control JSD device in order to inhibit the sale of spoiled product.

CAPACITY DIAGRAM

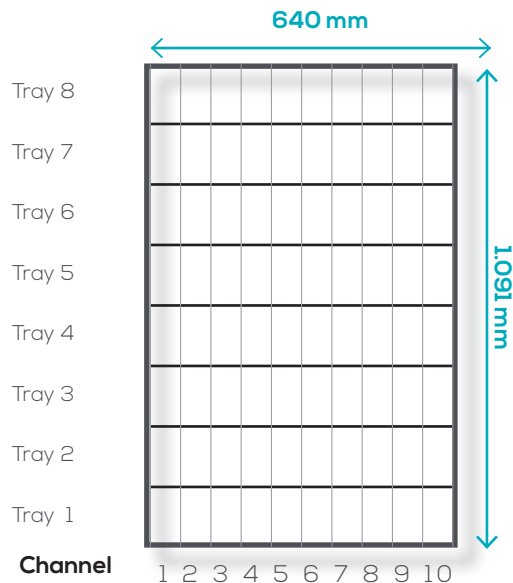

WIDE TRAYS

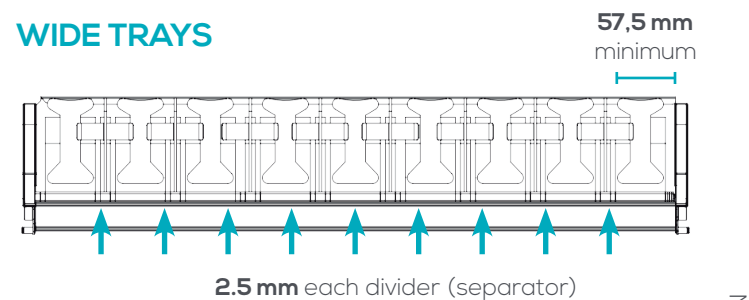

CHANNEL DEPTH



HEIGHT TABLE

Holes visible	Distance between trays	Product height pusher	Product height on pallet
8	135	94,5	76
10	162	121,5	103
12	189	148,5	130
14	216	175,5	157
16	243	202,5	184
18	270	229,5	211
20	297	256,5	238
22	324	283,5	265
24	351	310,5	292
26	378	337,5	319

Flexibility in tray between 1 to maximum of 10 motors.

TELEMETRY



Our Jofemar electronic system **J-LINK** offers a wide range of functionalities to all our machines. One of them is the ability to use J-SUITE, our comprehensive and unified solution for machine management that allows you full control of the machine from anywhere in the world.



ADVANTAGES

- Compatibility with all Jofemar machines. You can use J-SUITE with all our products. Total stock control.
- Sending of technical and administrative alerts.
- Remote control of the machines from your computer, tablet, or mobile phone.
- Compatible with other payment systems.
- Option to have a closed-loop card reader.
- Compatible with non-Jofemar machines through standard protocols.
- Maximum data storage security.
- Automatic daily data backups.
- Full availability at any time.
- Access to sales statistics.



COST CUTTING



**REAL-TIME STOCK
CONTROL**



**CUSTOMER
SATISFACTION**



**AGILITY IN
ACCOUNTING**



**OPERATIONS
ENHANCEMENT**



**ADMINISTRATIVE
OPTIMIZATION**



**ENHANCED
INFORMATION SECURITY**



Innovation
technology

Reliability



Jofemar
CORPORACIÓN

Ctra. Marcilla km 2
31350 Peralta · Navarra · España

Tel. +34 948 75 12 12

Fax +34 948 75 04 20

nacional@jofemar.com

www.jofemar.com



100% Jofemar
Technology



CE

VE-CT218EN001 0825